





WB-T-xxxx-L										
Model	Description	Motor Power (kW)	Pipework Termination (PN16)	BEP Performance		Dimensions				Dry Weight (kg)
				Flow (l/s)	Pressure (m/hd)	A	B	C	D	
WB-T-1006-L	WashBoost™ Twin 1006 Left Hand	3	DN50	3.18	69.42	180	645	322	348	1035
WB-T-1503-L	WashBoost™ Twin 1503 Left Hand	4	DN65	5.69	51.57	190	645	280	296	1025
WB-T-1505-L	WashBoost™ Twin 1505 Left Hand	5.5	DN65	5.31	74.49	190	693	280	296	1075
WB-T-2205-L	WashBoost™ Twin 2205 Left Hand	7.5	DN65	6.24	80.8	190	693	280	296	1095


NOTES:


1. ALL PIPE WORK IS ISO STAINLESS STEEL - 316L
2. PUMP ELECTRICAL SUPPLY - 400v/3ph/50Hz
3. VESSEL 24 Ltr WEIGHT = 18 Kg
PRESSURE VESSEL NOT TO EXCEED 16 Bar
4. FINISH: PUMPS & VESSEL
RAL 5010 BLUE GENERALLY IN ACCORDANCE WITH
WIMES 4.01 (ISSUE 3) TABLE 2.
5. CONTROL PANEL REF TO DRAWING T.B.C
6. ALL MOTOR CABLING IN STEEL WIRED ARMoured
CROSS BONDING OF ALL PIPE WORK AND EQUIPMENT.

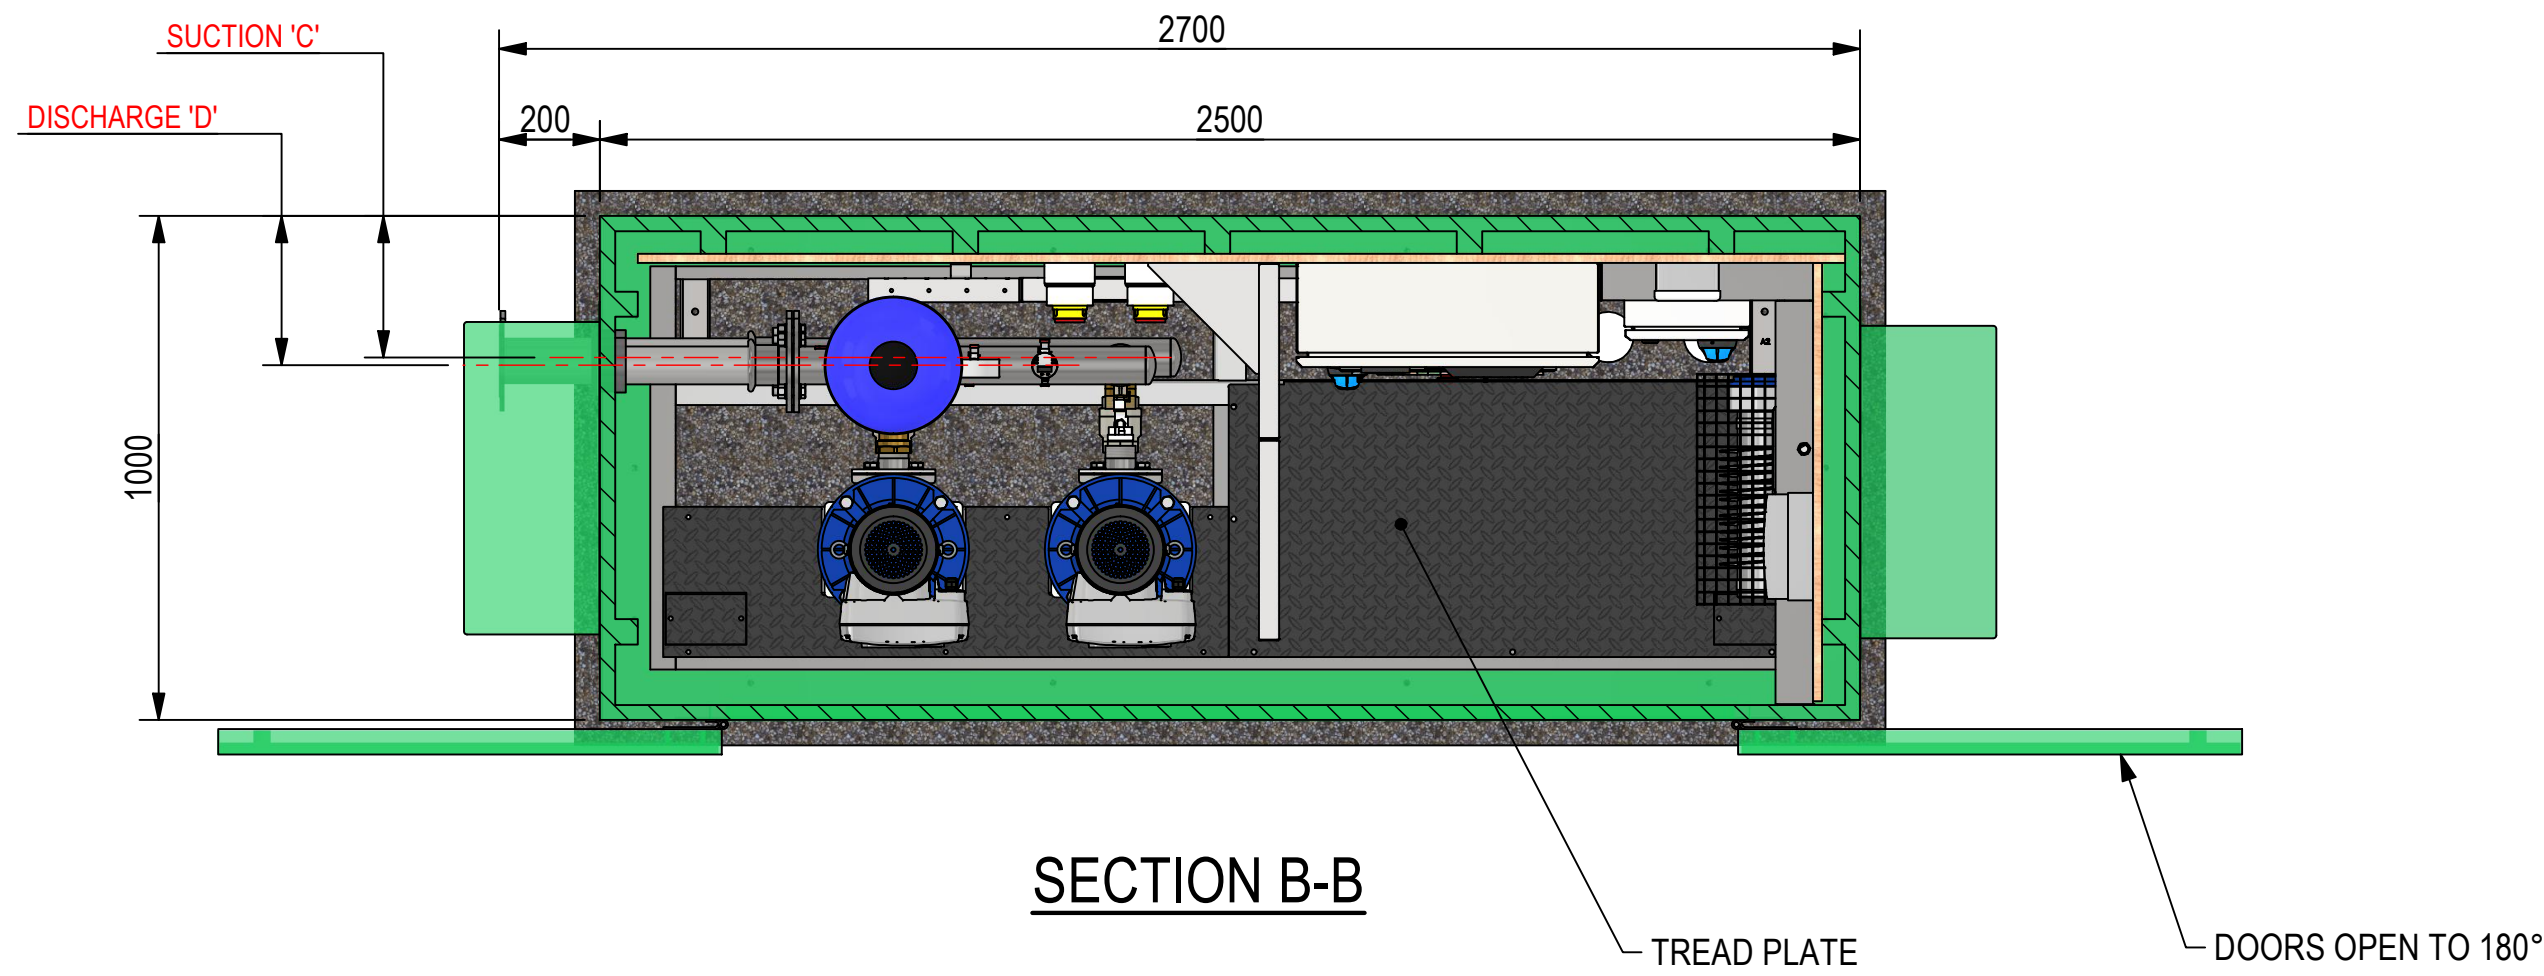


KIOSK
2500x1000x2350 C.I.H
Ext. COLOUR 14 - C - 39
Int COLOUR WHITE GRP

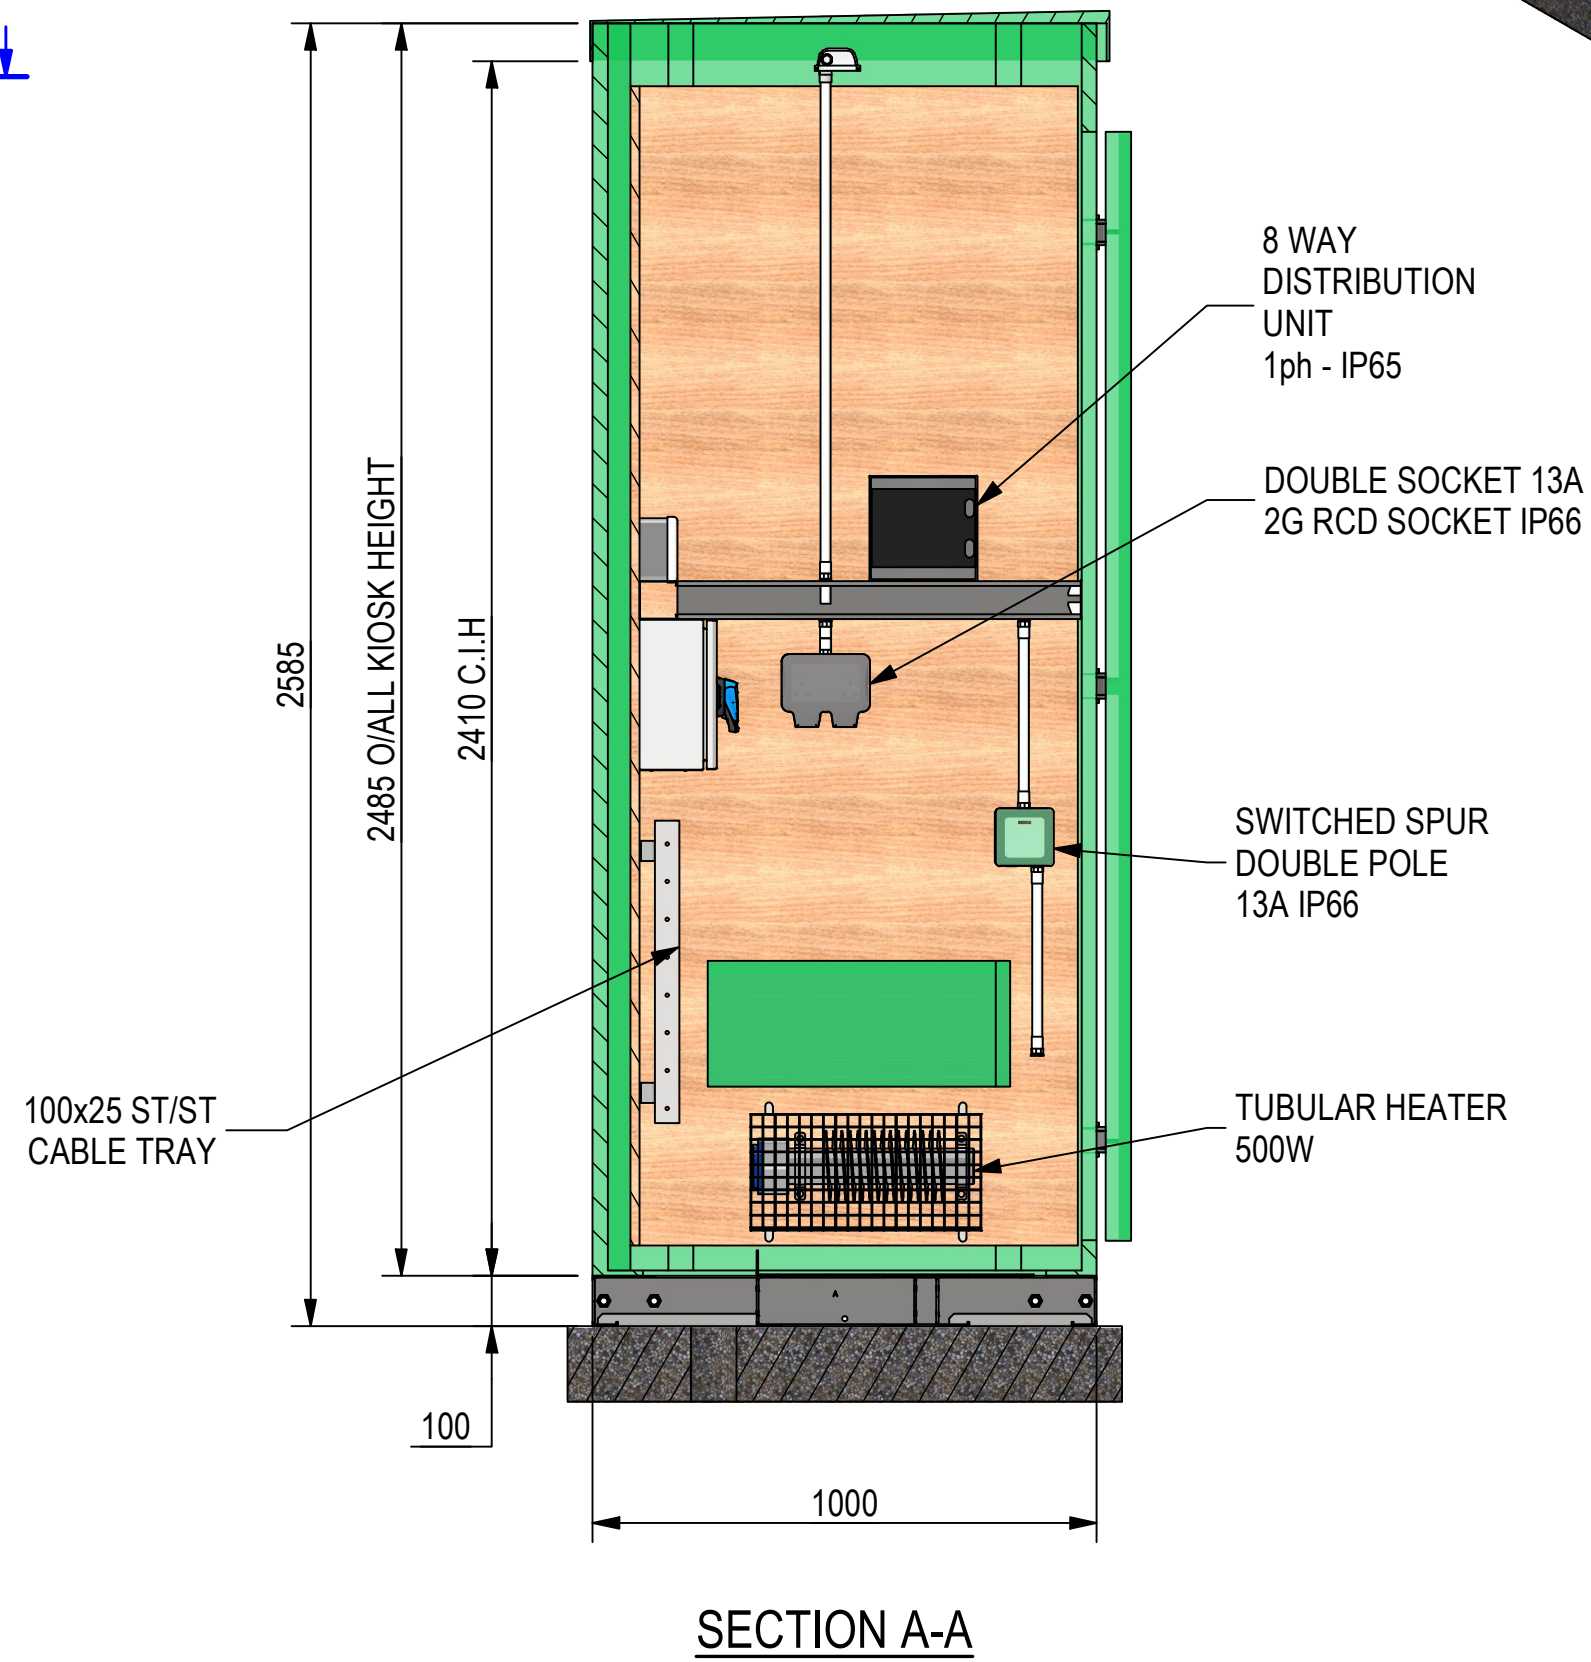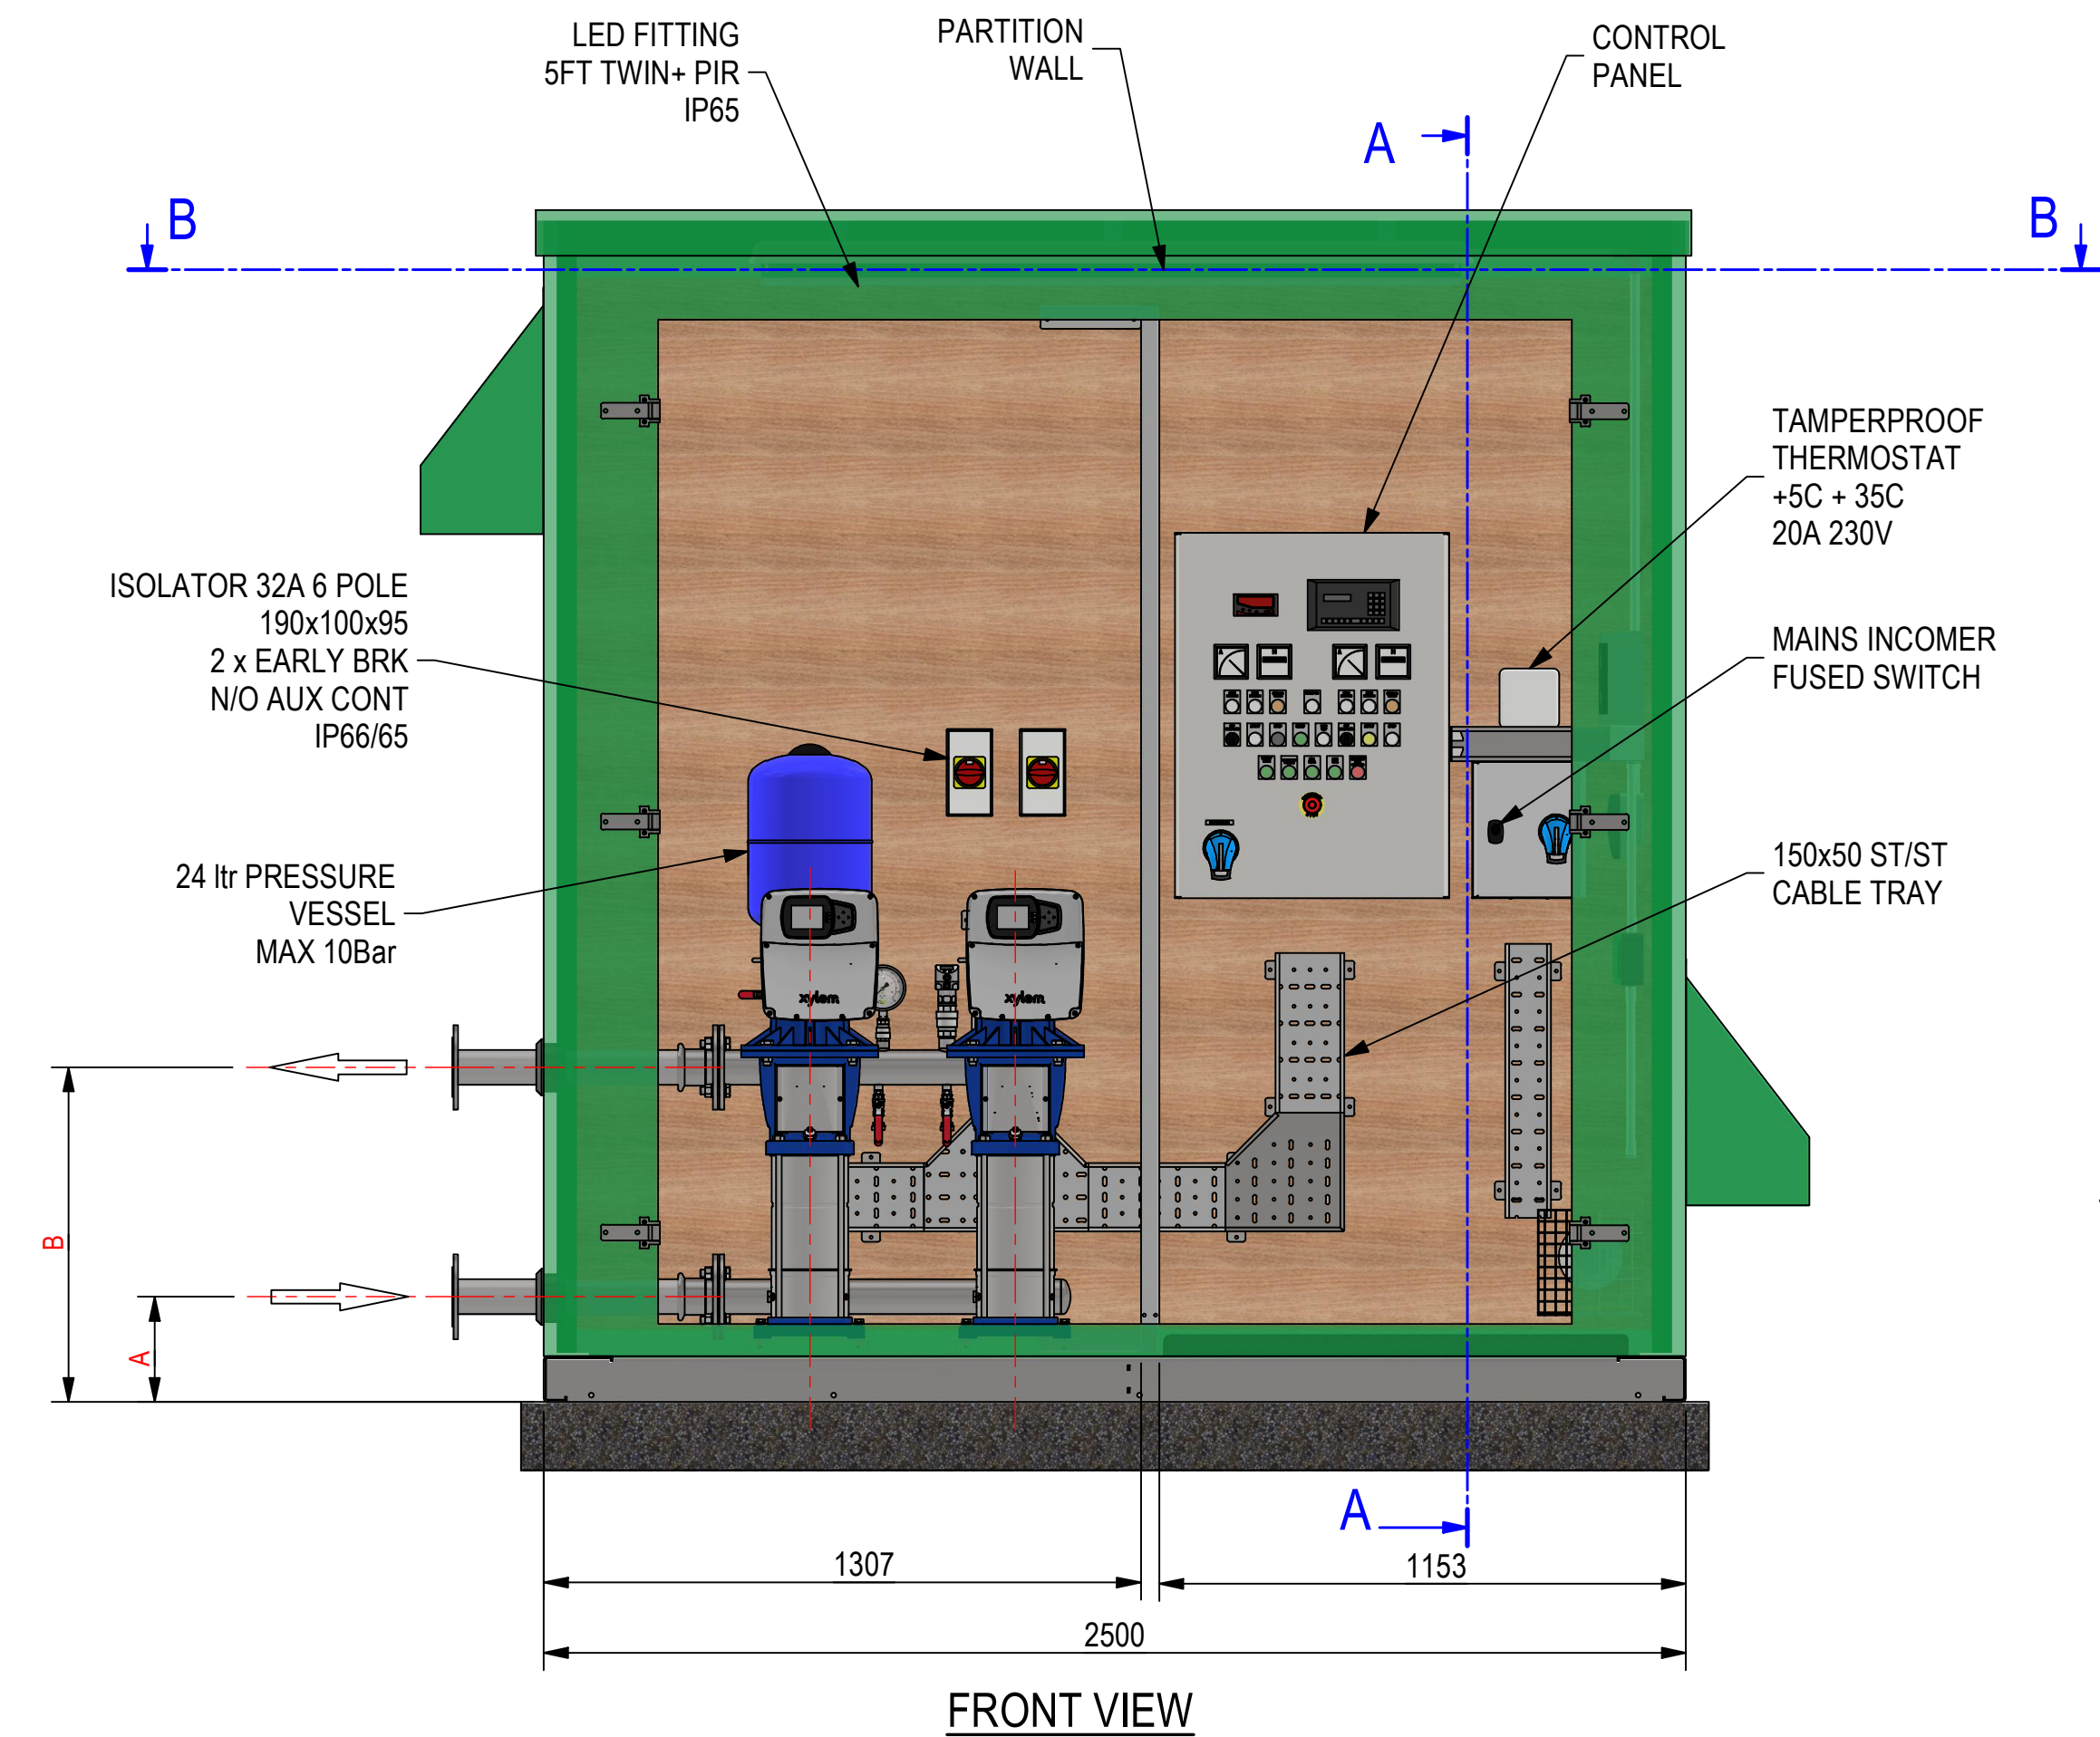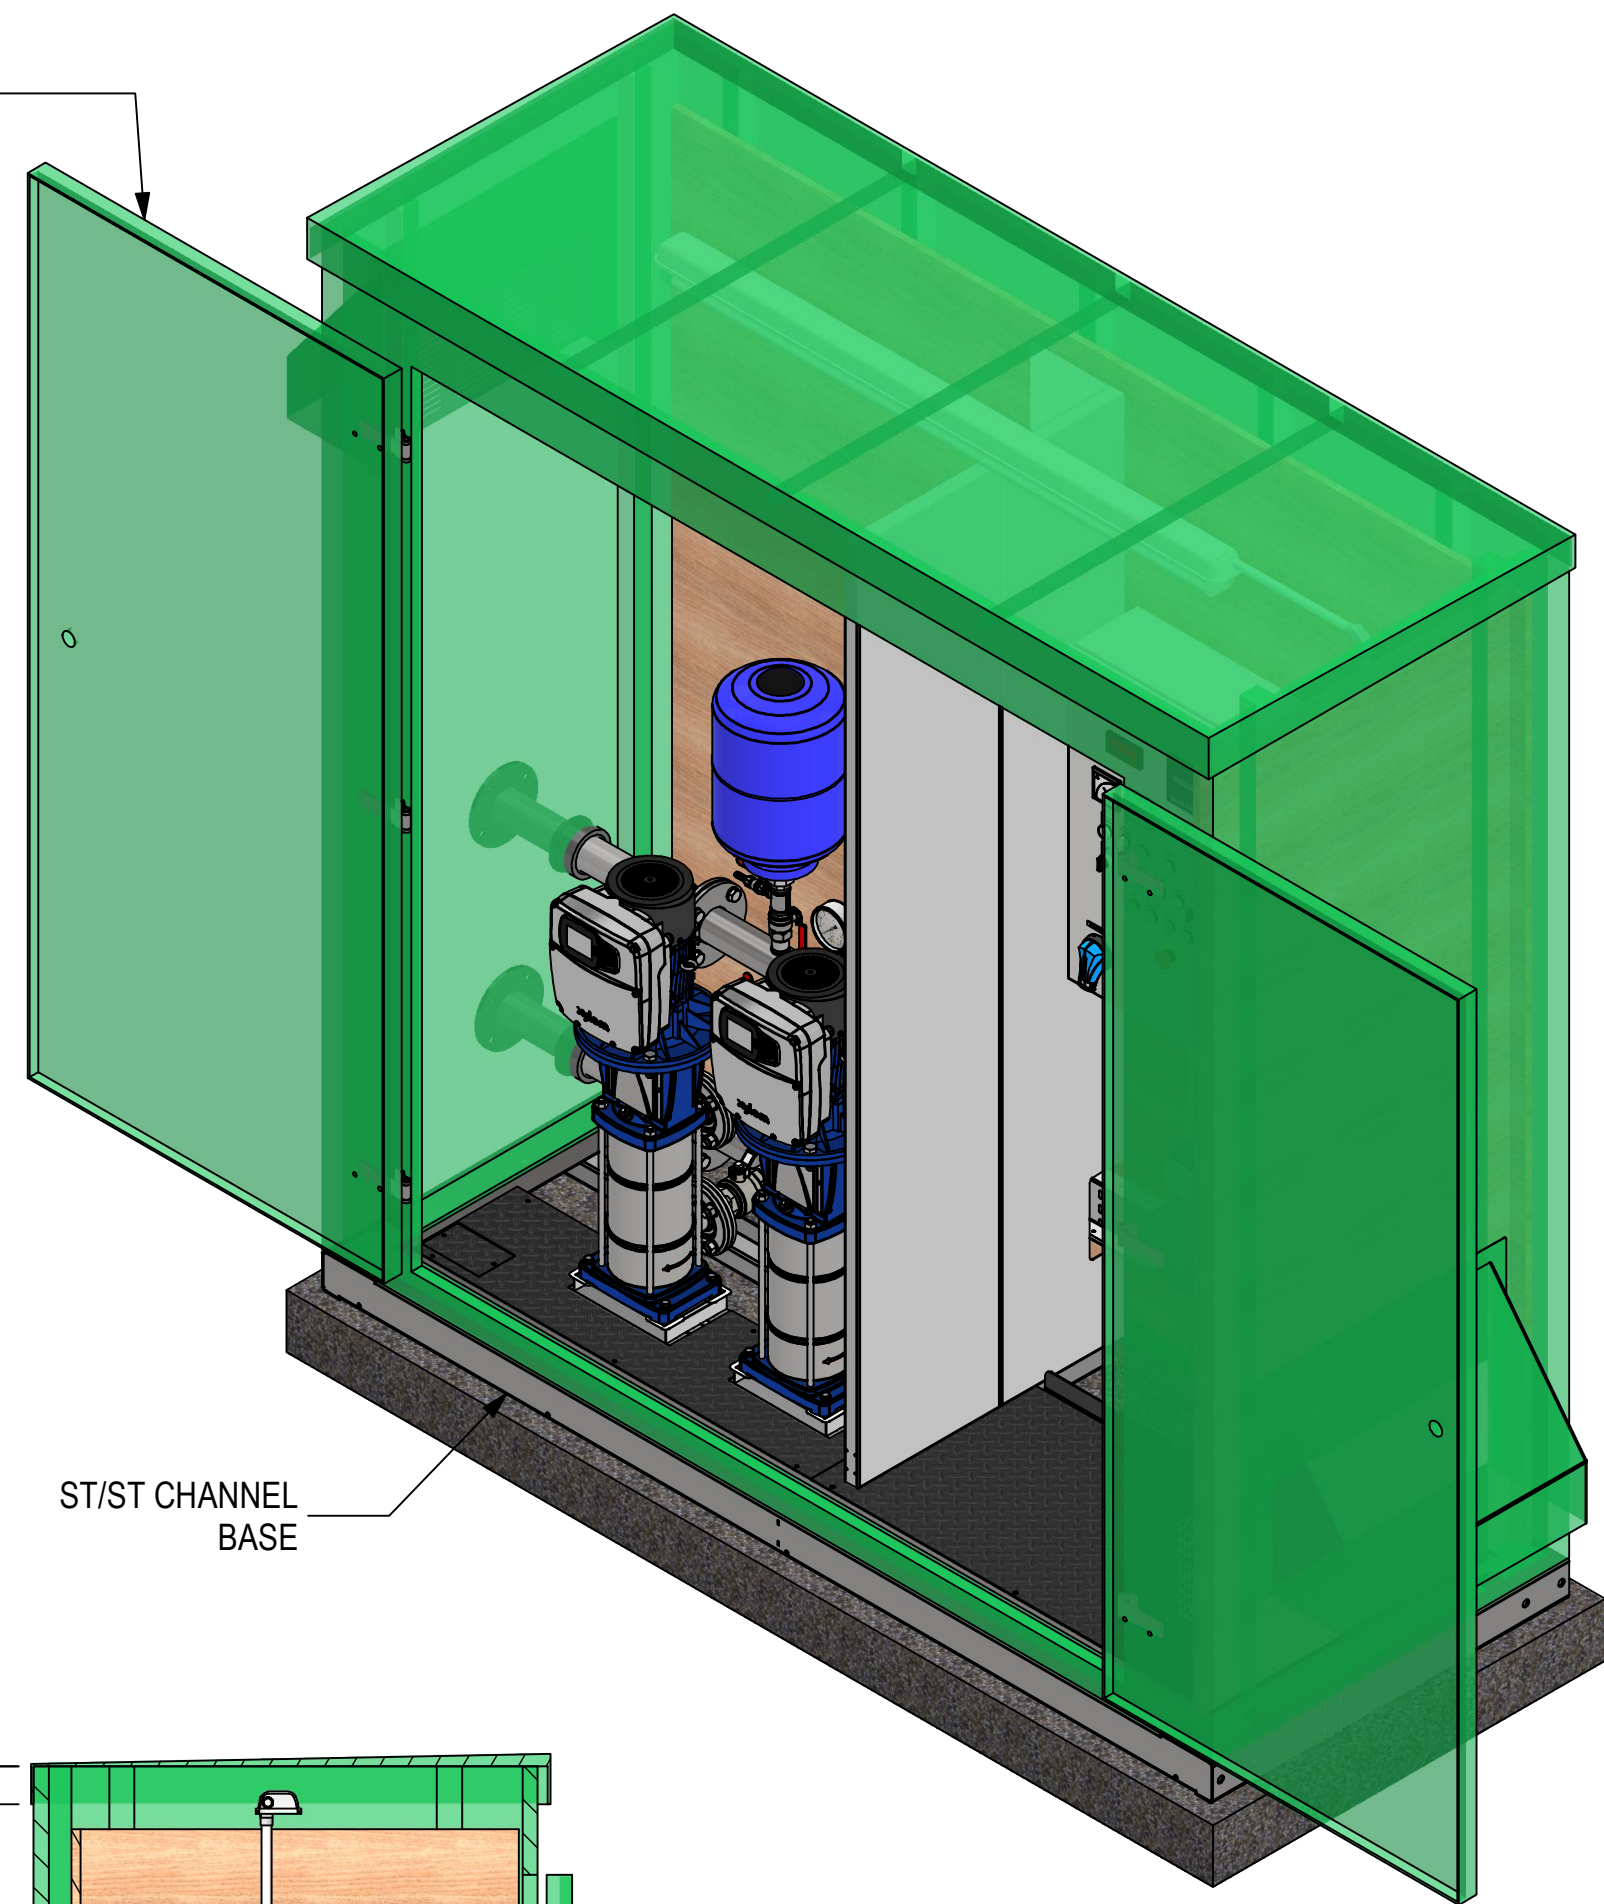

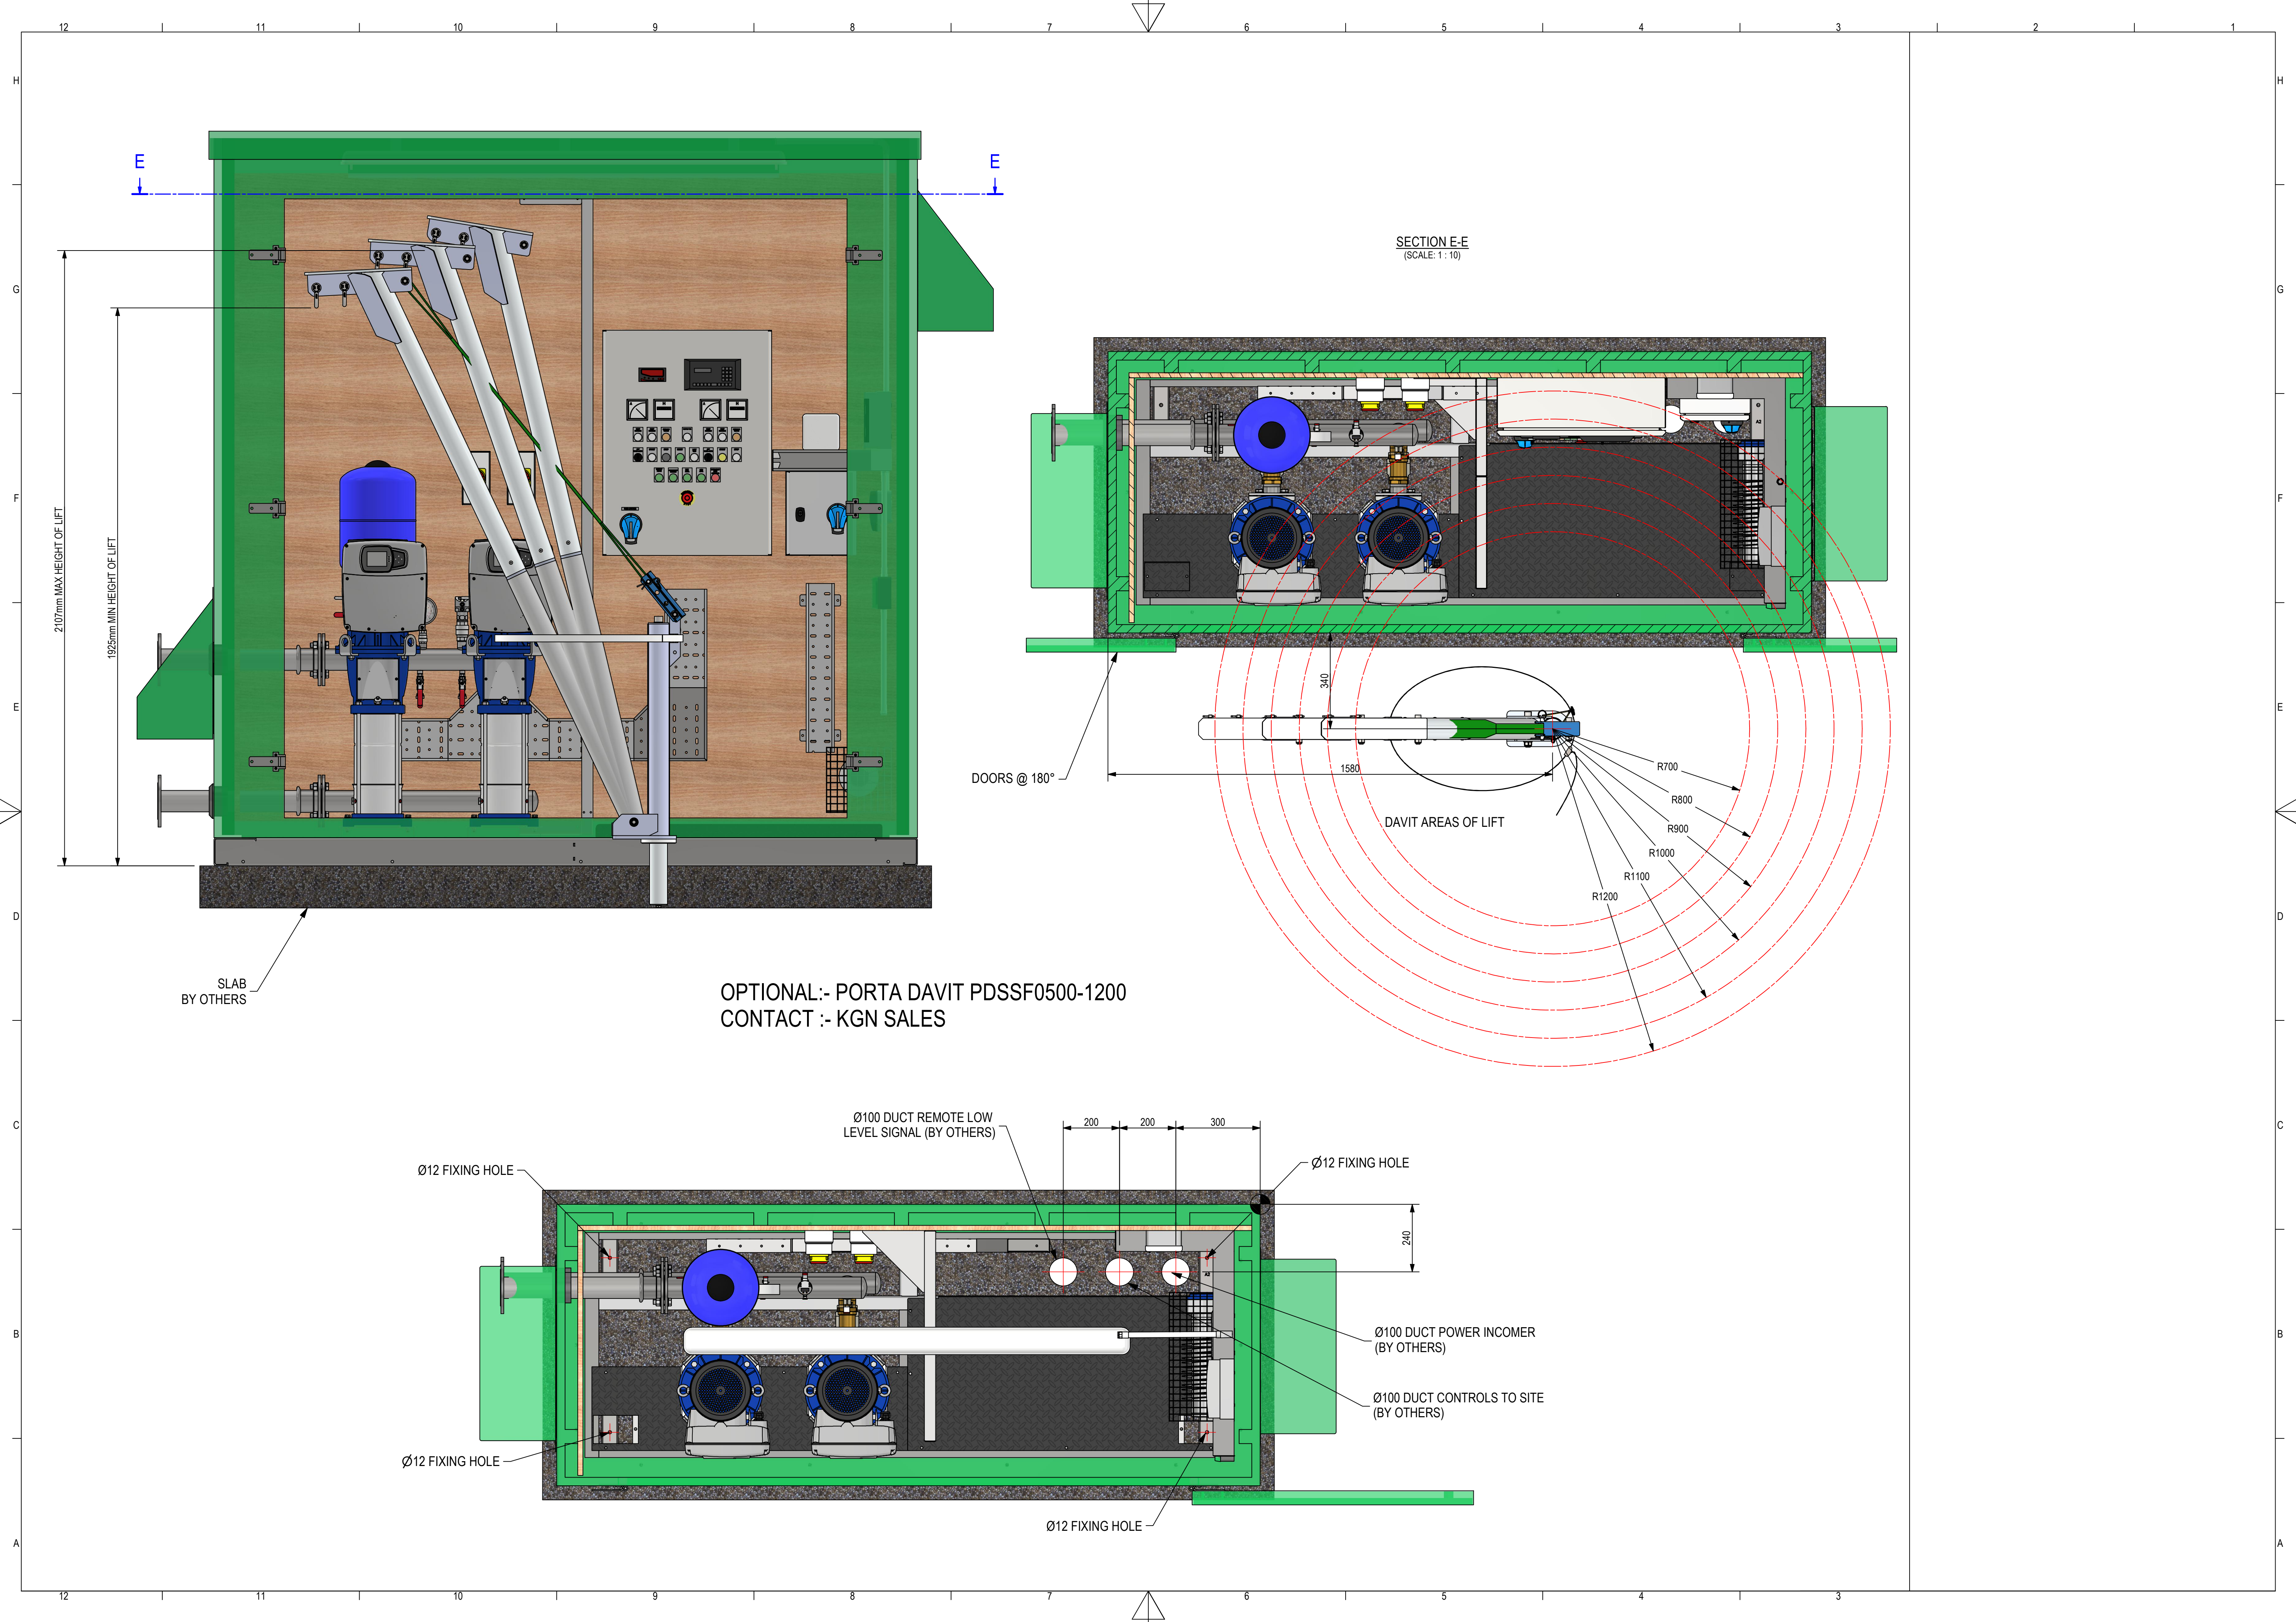

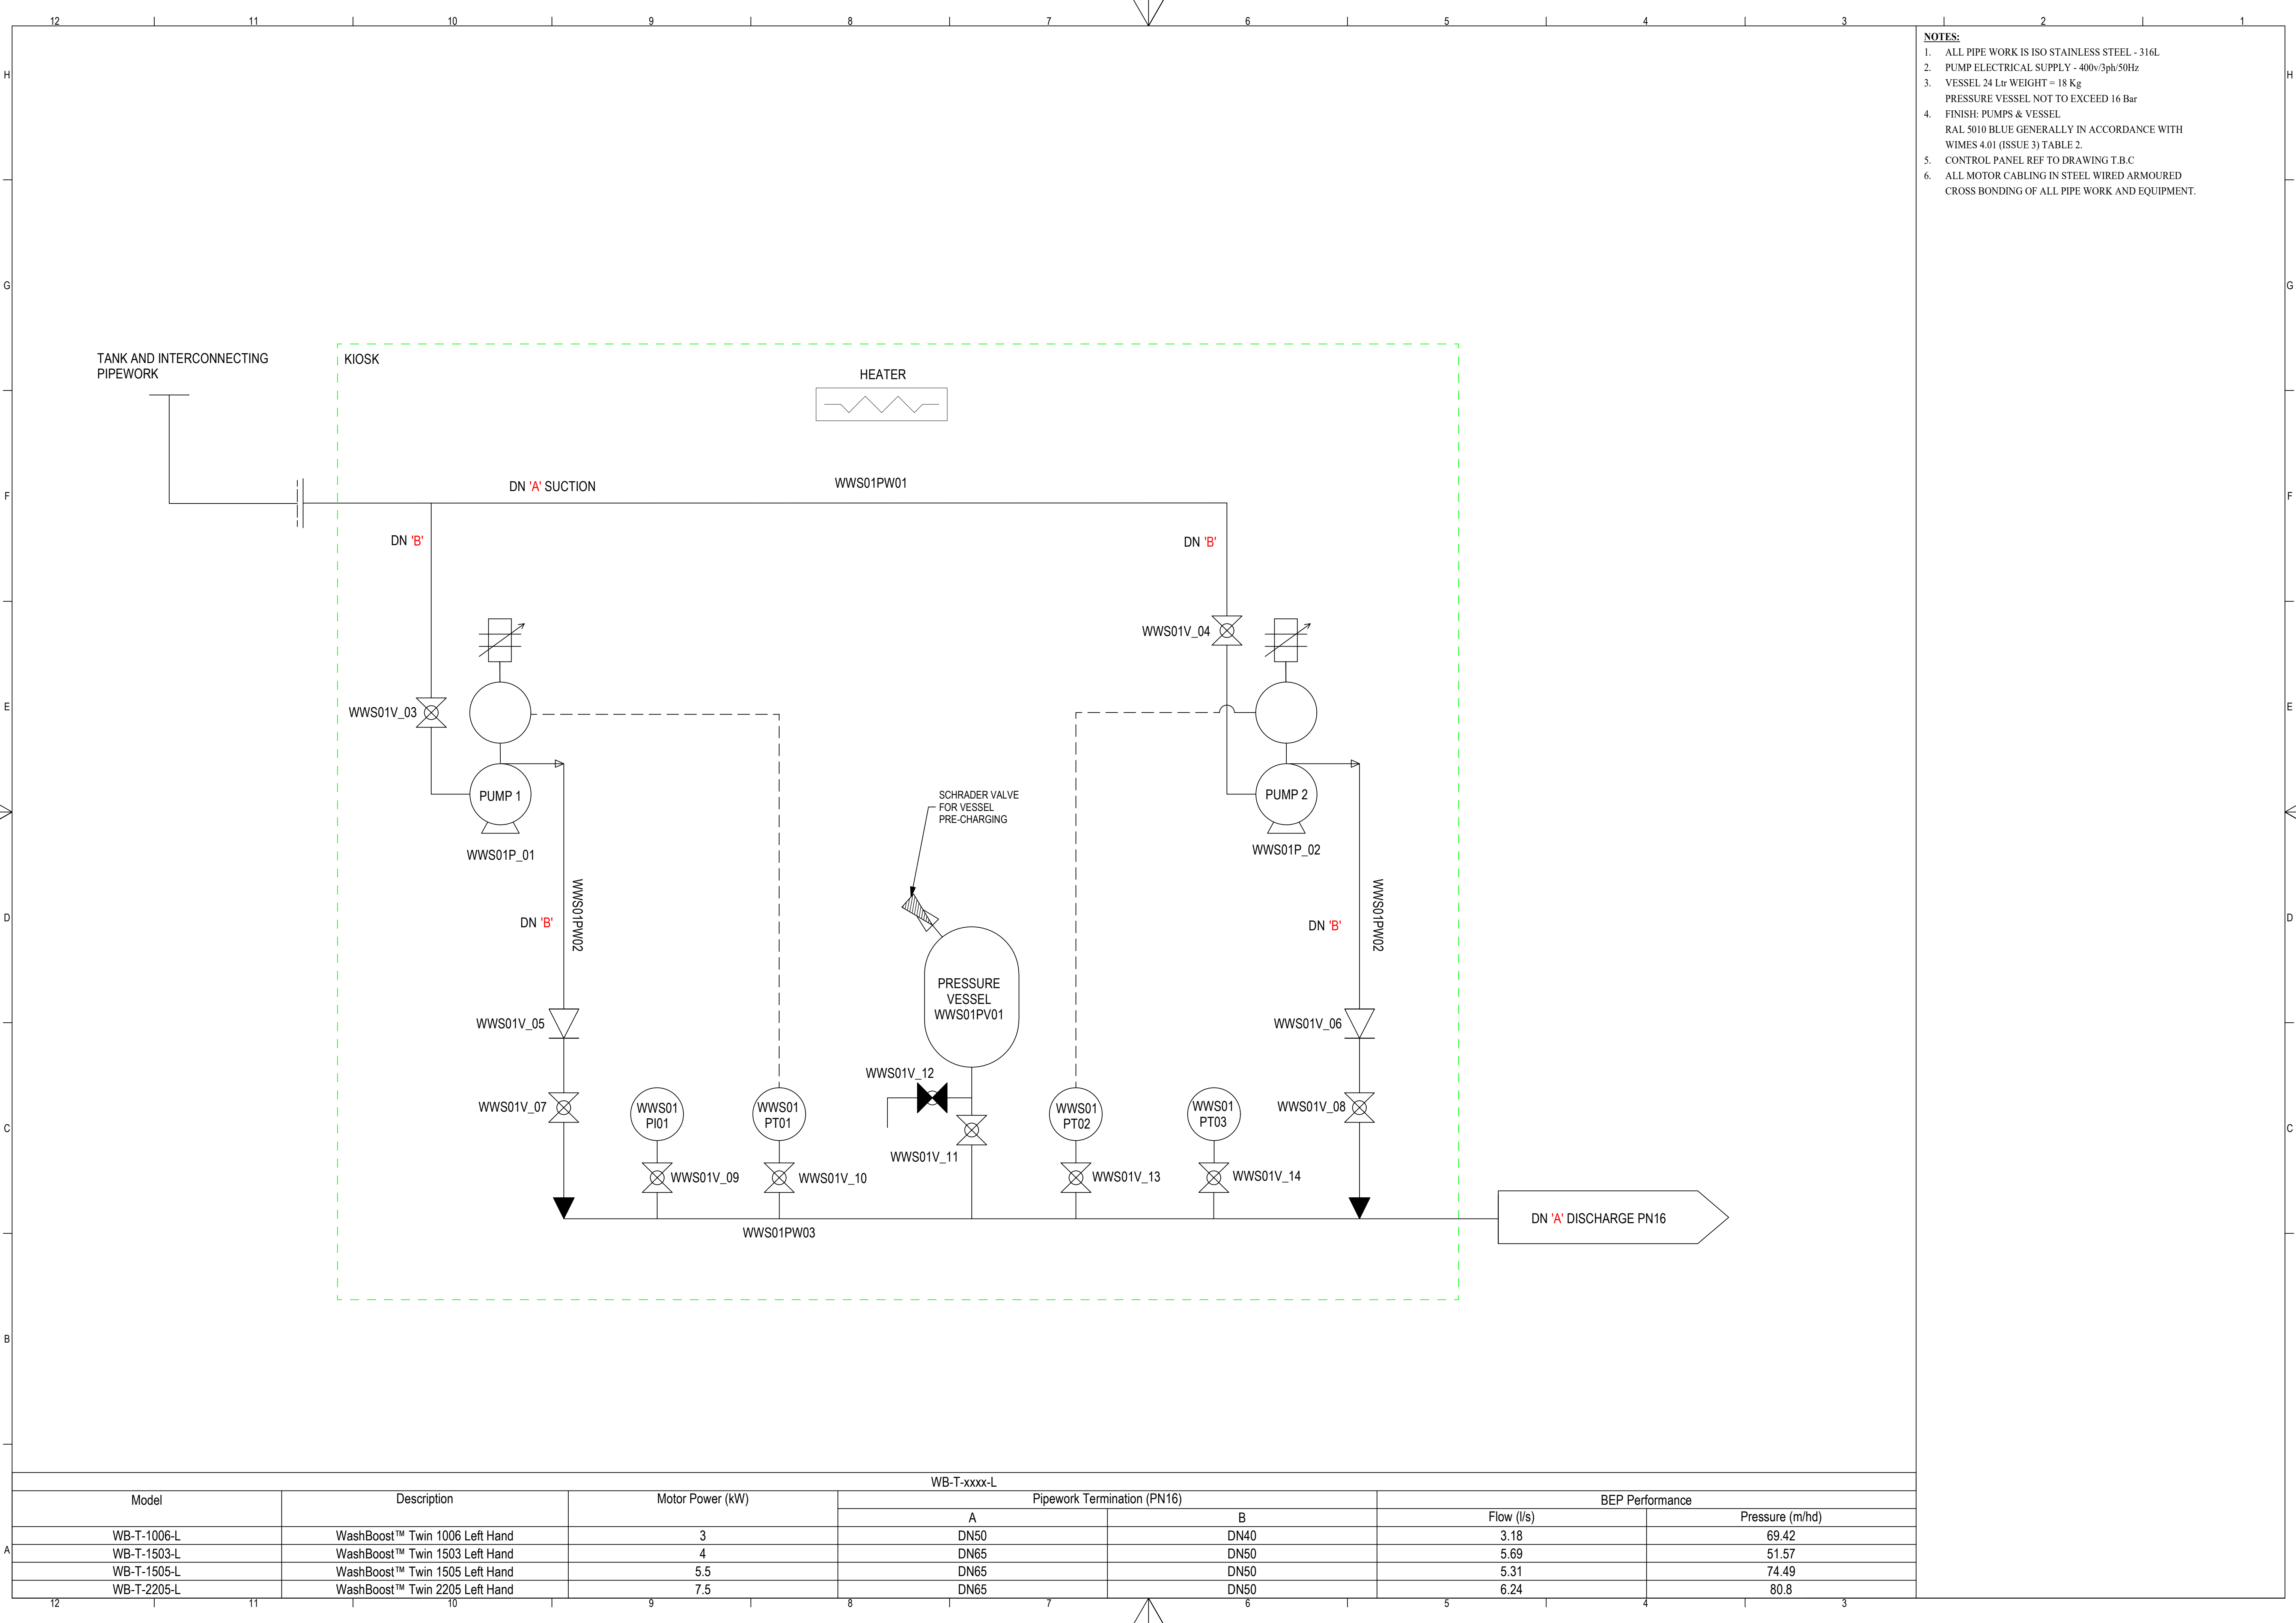

WB-T-xxxx-L						
Model	Description	Motor Power (kW)	Pipework Termination (PN16)		BEP Performance	
			A	B	Flow (l/s)	Pressure (m/hd)
WB-T-1006-L	WashBoost™ Twin 1006 Left Hand	3	DN50	DN40	3.18	69.42
WB-T-1503-L	WashBoost™ Twin 1503 Left Hand	4	DN65	DN50	5.69	51.57
WB-T-1505-L	WashBoost™ Twin 1505 Left Hand	5.5	DN65	DN50	5.31	74.49
WB-T-2205-L	WashBoost™ Twin 2205 Left Hand	7.5	DN65	DN50	6.24	80.8

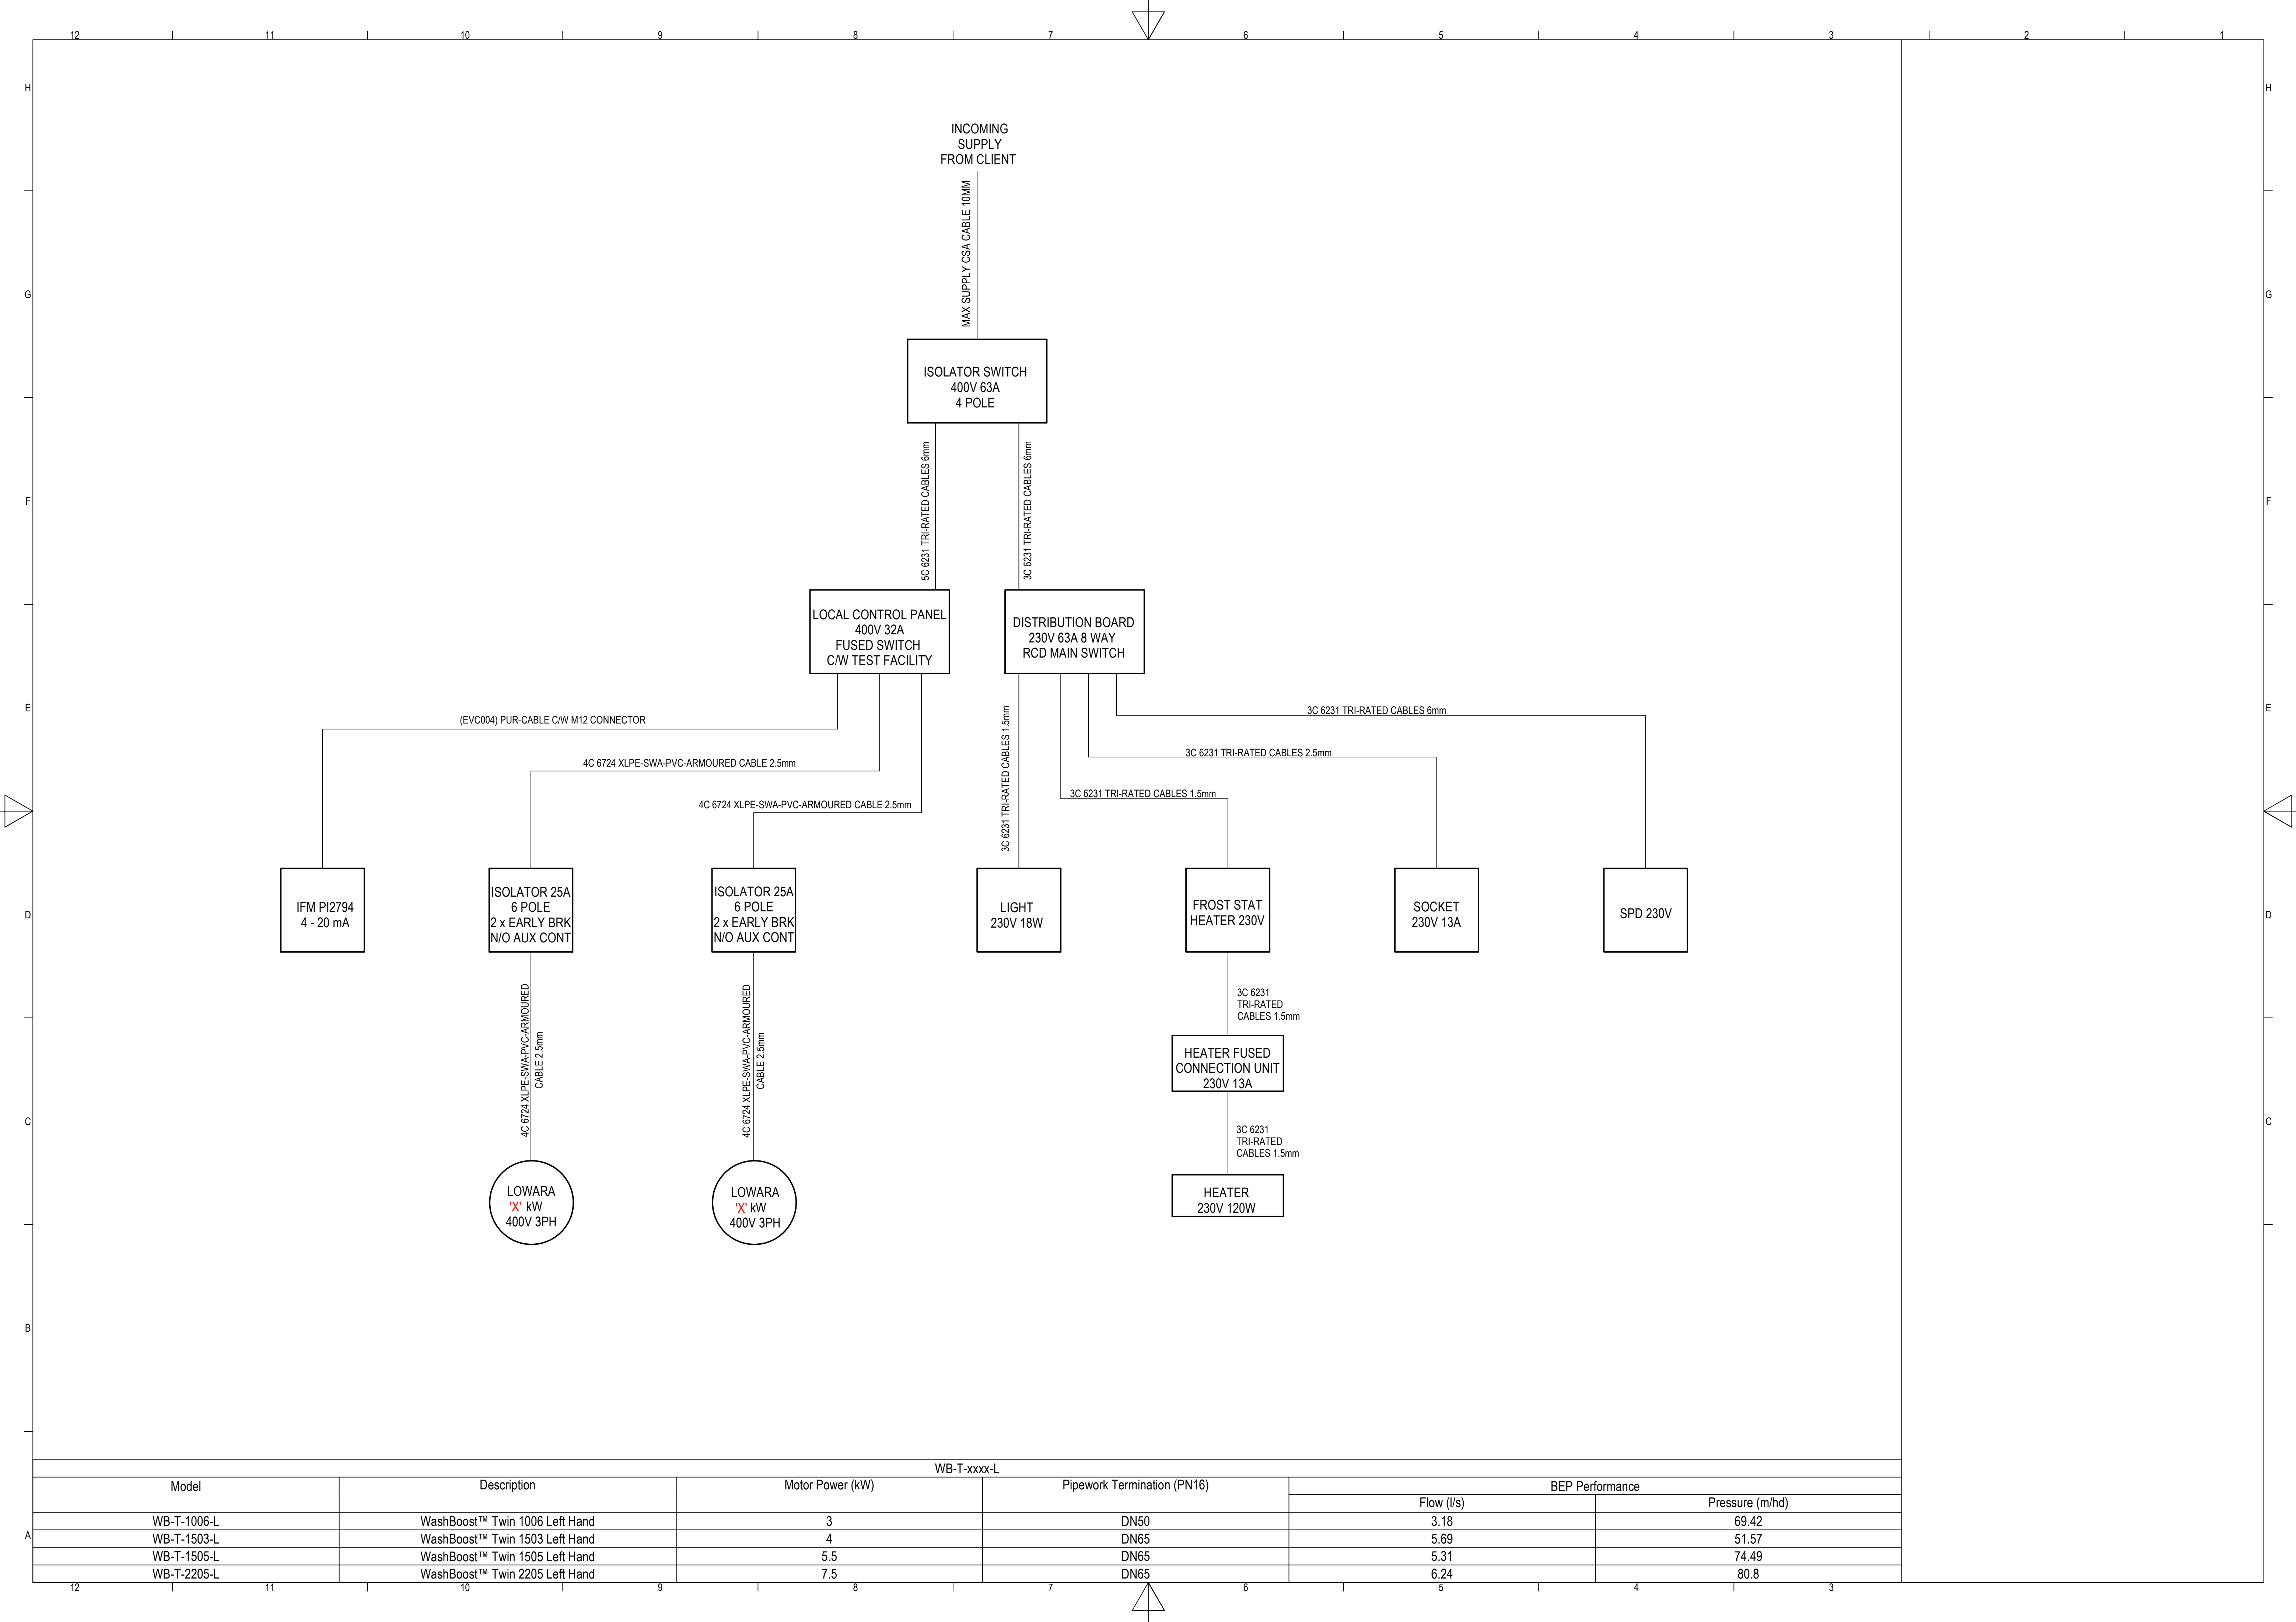

WB-T-xxxx-L					
Model	Description	Motor Power (kW)	Pipework Termination (PN16)	BEP Performance	
				Flow (l/s)	Pressure (m/hd)
WB-T-1006-L	WashBoost™ Twin 1006 Left Hand	3	DN50	3.18	69.42
WB-T-1503-L	WashBoost™ Twin 1503 Left Hand	4	DN65	5.69	51.57
WB-T-1505-L	WashBoost™ Twin 1505 Left Hand	5.5	DN65	5.31	74.49
WB-T-2205-L	WashBoost™ Twin 2205 Left Hand	7.5	DN65	6.24	80.8